

Features

- Tankless flushing system with direct water supply
- Dual flush: 1.0/1.28 gpf
- Auto open/close lid
- Kick open/close seat & lid
- Auto bowl pre-wetting before each use
- Front wash, rear wash and movement wash
- Adjustable heated seat, warm air dryer and water temperature
- Adjustable nozzle position and cleaning water pressure
- Stainless steel, arc-shaped and self-cleaning nozzle
- UV sterilization
- Auto deodorization
- Auto flush
- LED digital display and night light
- Eco-friendly energy-saving mode
- Blackout flush




Installation

- 10" (250 mm) rough-in
- Electrical requirements: 10 Amps at AC 120 V, 60 Hz

Notes

- Install the product based on the installation instructions.
- Before installing the toilet, please reserve enough installation space.

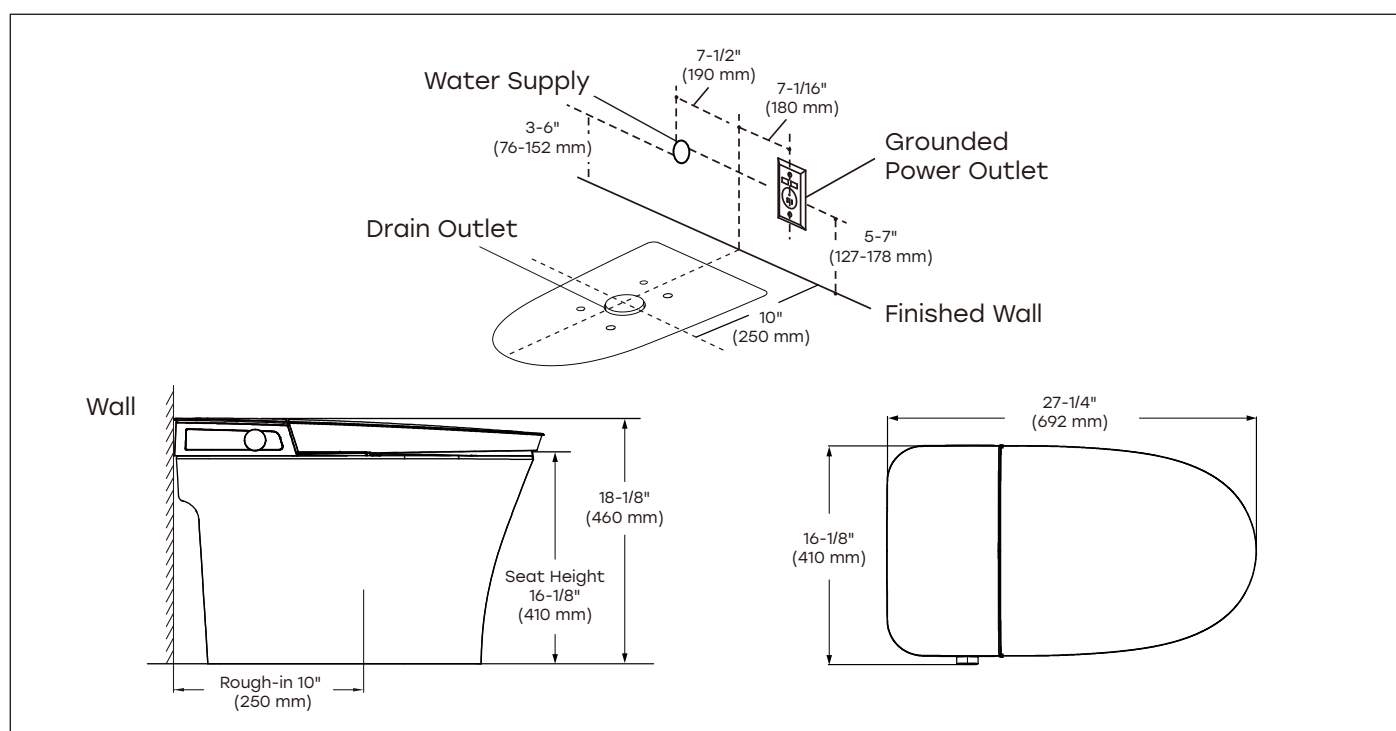

Technical Information

All product dimensions are nominal.

- Dimensions: 27-1/4" (L) * 16-1/8" (W) * 18-1/8" (H)
- Rough In Size: 10" (250 mm)
- Gallons Per Flush (US gallon): 1.0/1.28 gpf
- Installation Type: Floor-mount
- Bowl Shape: Elongated
- Power Cord Length: 33-7/16" (850 mm)
- Min Water Pressure: 20.3 psi
- Max Water Pressure: 108 psi

Parts Included

- Smart Toilet
- Installation Kit
- Remote Control & Batteries
- Manual