

Features

- Tankless flushing system with direct water supply
- Auto bowl pre-wetting before each use
- Front wash, rear wash and movement wash
- Adjustable heated seat and cleaning water temperature
- Adjustable nozzle position and cleaning water pressure
- Stainless steel, arc-shaped and self-cleaning nozzle
- Auto flush
- Kick flush
- Eco-friendly energy-saving mode
- Blackout flush
- Easy-clean glaze
- Soft close




Installation

- Standard 12" (305 mm) rough-in
- Electrical requirements: 10 Amps at AC 120 V, 60 Hz

Notes

- Install the product based on the installation instructions.
- Before installing the toilet, please reserve enough installation space.

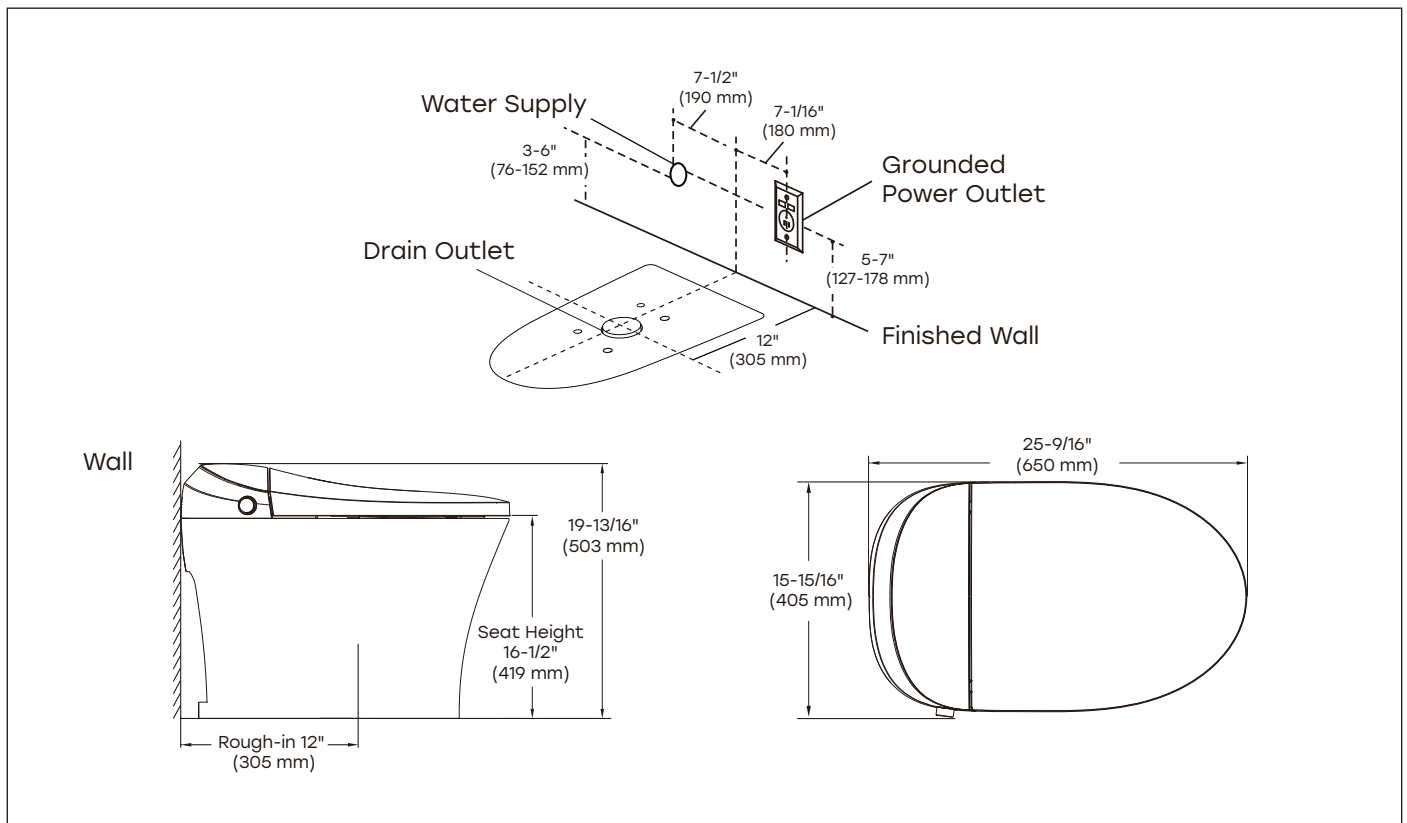

Technical Information

All product dimensions are nominal.

- Dimensions: 25-9/16" (L) * 15-15/16" (W) * 19-13/16" (H)
- Rough In Size: 12" (305 mm)
- Gallons Per Flush (US gallon): 1.28 gpf
- Installation Type: Floor-mount
- Bowl Shape: Elongated
- Power Cord Length: 33-7/16" (850 mm)
- Min Water Pressure: 20.3 psi
- Max Water Pressure: 108 psi

Parts Included

- Smart Toilet
- Installation Kit
- Remote Control & Batteries
- Manual